

OVEN CONTROLLED CRYSTAL OSCILLATOR

PLUG-IN MODEL: OXO10-1-349


FEATURES:

- ▶ Exceptionally Low Phase Noise
- ▶ Fast Warm-up Time
- ▶ Low Power Consumption
- ▶ Tight Frequency Stability
- ▶ Excellent Long-Term Stability
- ▶ El. Frequency Tuning Input
- ▶ Reference Voltage Output
- ▶ Small CO-8 package



SPECIFICATIONS

Nominal Frequency F_N	10.000 MHz
Frequency Stability	
Within operating range	$\leq \pm 7 \times 10^{-9}$
vs. supply voltage changes $V_s \pm 10\%$	$\leq \pm 5 \times 10^{-10}$
vs. load changes 50 Ohm $\pm 10\%$	$\leq \pm 5 \times 10^{-10}$
Aging (after 30 days of continuous operation)	
Per day	$\leq \pm 5 \times 10^{-10}$
Per Year	$\leq \pm 5 \times 10^{-8}$
10 Years	$\leq \pm 3 \times 10^{-7}$
Frequency Tuning Range	
	$\geq \pm 4 \times 10^{-7}$
Tuning Voltage Range V_c	
	0 to 5 V
Reference Voltage Output V_{REF}	
	+5 V $\pm 5\%$
Supply Voltage V_s	
	+12.0 V $\pm 10\%$
Supply Current I_s	
Steady State @ +25 °C	≤ 200 mA
Steady State @ +40 °C	≤ 500 mA
During Warm-up	≤ 600 mA
Warm Up Time	
To $dF/F_0 < \pm 5 \times 10^{-8}$ referred to F_0 after 1 hour	≤ 10 min.
Output signal type	
	Sine wave
Initial output level	
	$\geq +3$ dBm
Output load impedance:	
	50 Ohm
Harmonics:	
	≤ -30 dBc
Typical Phase Noise	
10 Hz	-130 dBc/Hz
100 Hz	-150 dBc/Hz
1 kHz	-155 dBc/Hz
10 kHz	-165 dBc/Hz
100 kHz	-165 dBc/Hz
Temperature Ranges	
Operating	-40 °C ... +75 °C
Storage	-40 °C ... +85 °C

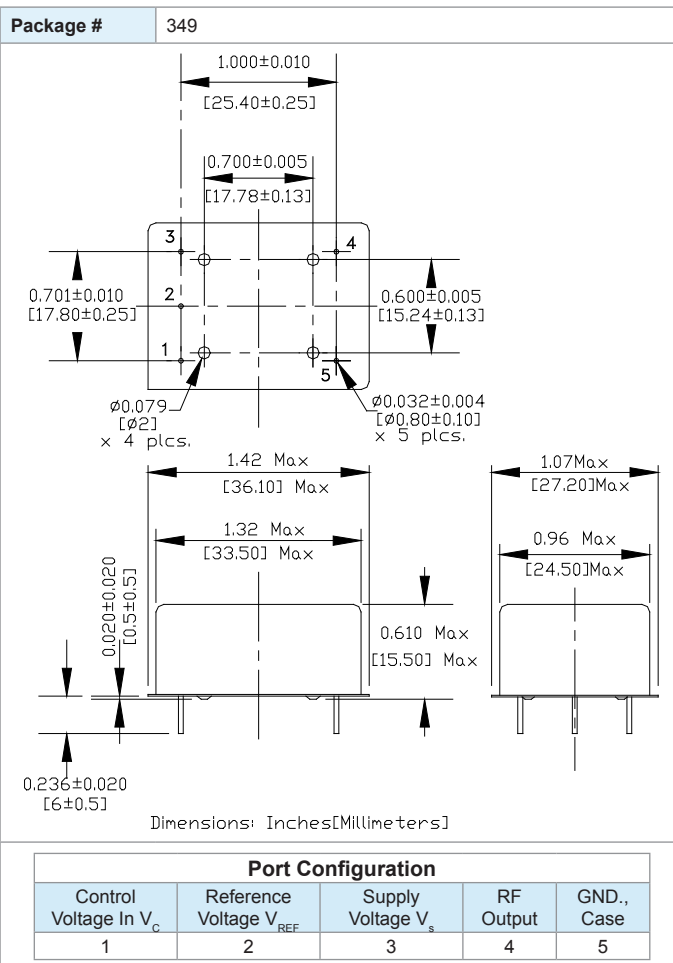

OVEN CONTROLLED CRYSTAL OSCILLATOR PLUG-IN MODEL: OXO10-1-349

PERFORMANCE PLOTS

Phase Noise 10 MHz High Performance OXO

