

LOW PASS FILTER


PLUG-IN MODEL: FLP-12

CUT-OFF FREQUENCY

F_c = 12 MHz


FEATURES:

- ▶ Small Size
- ▶ Optimum Performance

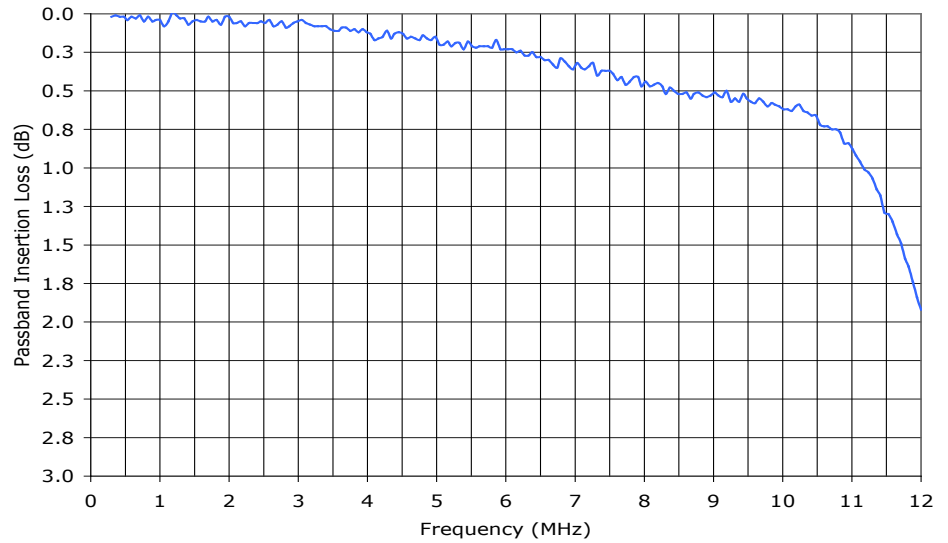

SPECIFICATIONS (Rev. A 10/10/07)

Passband	DC-10.7 MHz						
3 dB Cut-off Frequency	12 MHz						
Passband Insertion Loss	1.0 dB (Max.)						
Stopband Frequencies	<table border="1"> <tr> <td>@ 21 MHz</td> <td>35 dB (Min.)</td> </tr> <tr> <td>@ 19 MHz</td> <td>23 dB (Min.)</td> </tr> <tr> <td>@ 16 MHz</td> <td>20 dB (Min.)</td> </tr> </table>	@ 21 MHz	35 dB (Min.)	@ 19 MHz	23 dB (Min.)	@ 16 MHz	20 dB (Min.)
@ 21 MHz	35 dB (Min.)						
@ 19 MHz	23 dB (Min.)						
@ 16 MHz	20 dB (Min.)						
Power Rating	1 Watt (Max.)						
Impedance	50 Ohms (Nom.)						
VSWR (Passband)	1.7:1 dB (Typ.)						
Operating Temperature Range	-55 to +100 °C						

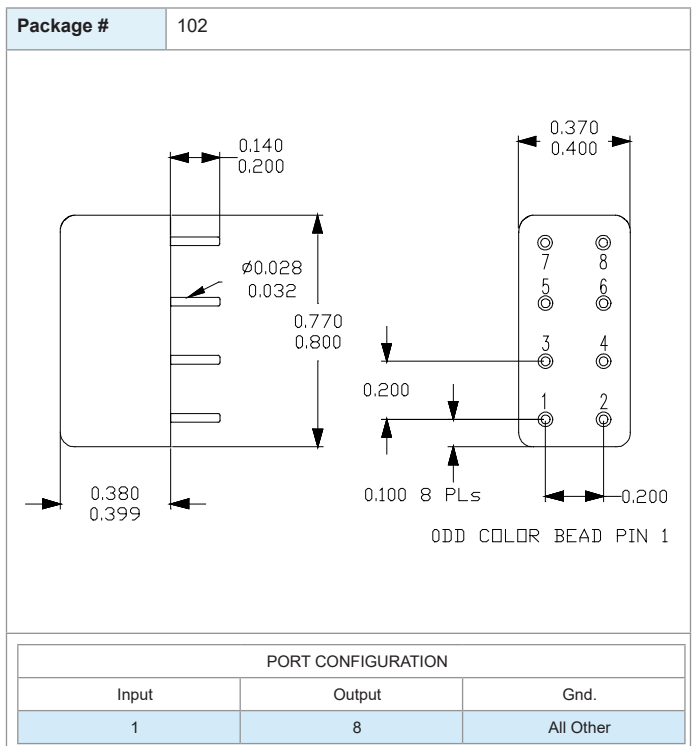


LOW PASS FILTER

PLUG-IN MODEL: FLP-12

CUT-OFF FREQUENCY

$F_c = 12 \text{ MHz}$

PERFORMANCE PLOTS

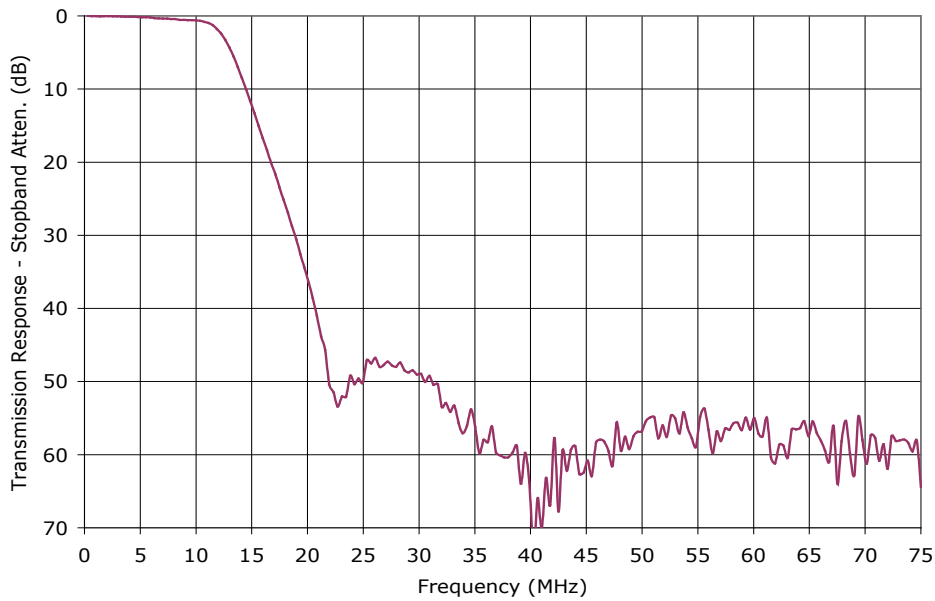

LOW PASS FILTER

PLUG-IN MODEL: FLP-12

CUT-OFF FREQUENCY

$F_c = 12 \text{ MHz}$

PERFORMANCE PLOTS

