

90° HYBRID

CONNECTORIZED MODEL: DQK-2-125B

125:1 BANDWIDTH

2 - 250 MHz

FEATURES:

- ▶ Building Block For:
 - Power Amplifiers
 - Image Rejection Mixers
 - I & Q / SSB Modulators
 - Phase Shifters & More...



SPECIFICATIONS

Frequency	2 - 250 MHz	
Insertion Loss (dB) *	Typ.	Max.
	1.8	2.0
Amplitude Unbalance (dB)	Typ.	Max.
	1.0	1.3
Phase Unbalance (Deg.)	Typ.	Max.
	4.0	6.0
Isolation (dB)	Typ.	Min.
	20	15
Input Power	1 Watt (Max.)	
Impedance	50 Ohms (Nom.)	
VSWR	1.4:1 (Typ.)	
Operating Temperature Range	-55 to +85 °C	

* Insertion loss in excess of the theoretical 3 dB coupling.

Package #	150
-----------	-----

PORT CONFIGURATION			
Input	Isolated*	+90° Output	0° Output
1	2	4	3

* Terminate ISOLATED port with 50 Ohms.



90° HYBRID

CONNECTORIZED MODEL: DQK-2-125B

125:1 BANDWIDTH

2 - 250 MHz

Data @ 25°C

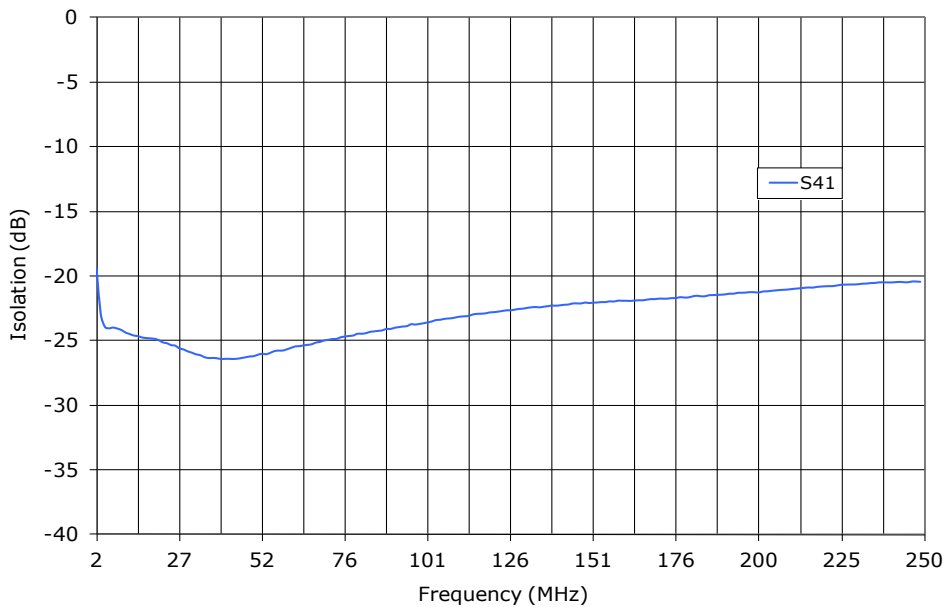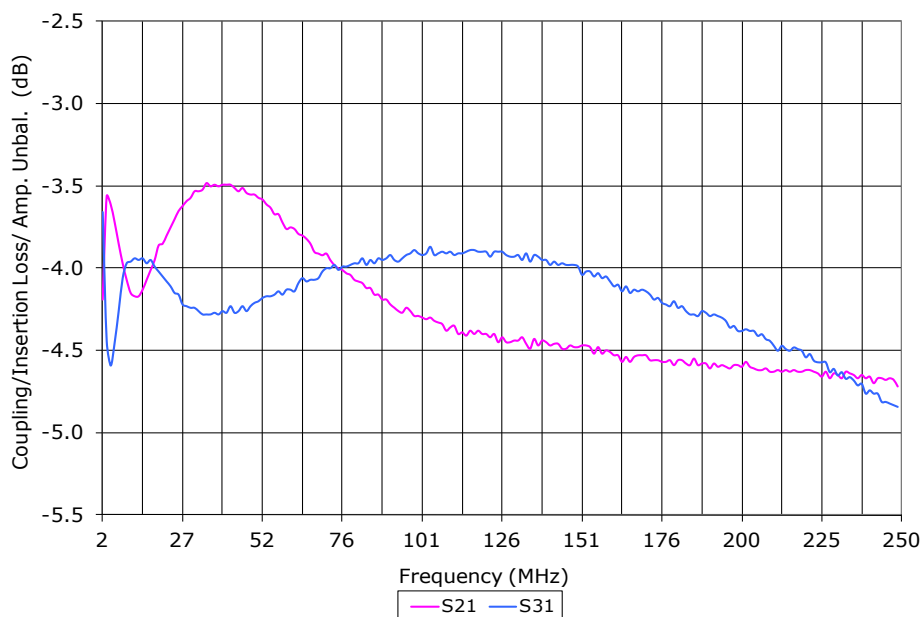

PERFORMANCE PLOTS



90° HYBRID

CONNECTORIZED MODEL: DQK-2-125B

125:1 BANDWIDTH

2 - 250 MHz

Data @ 25°C

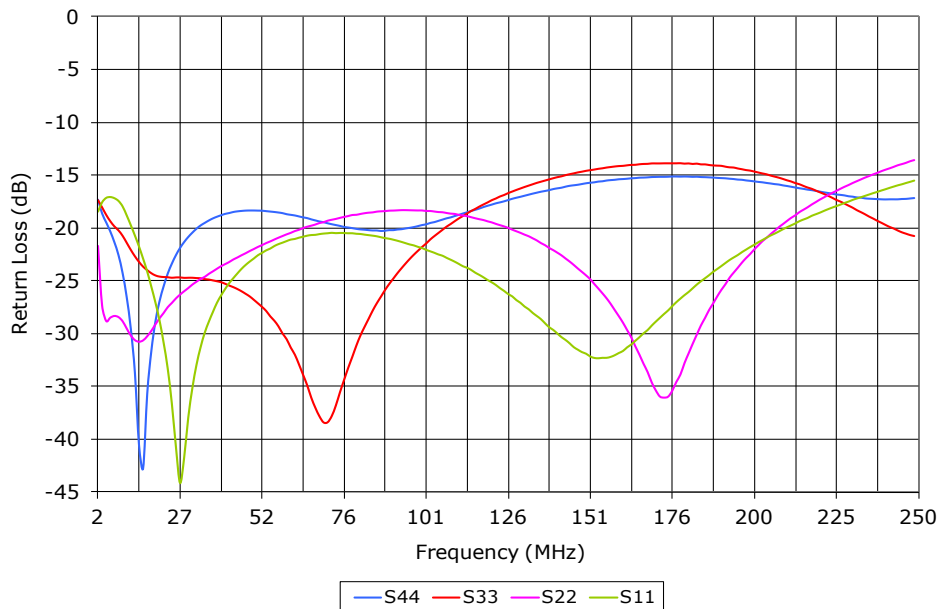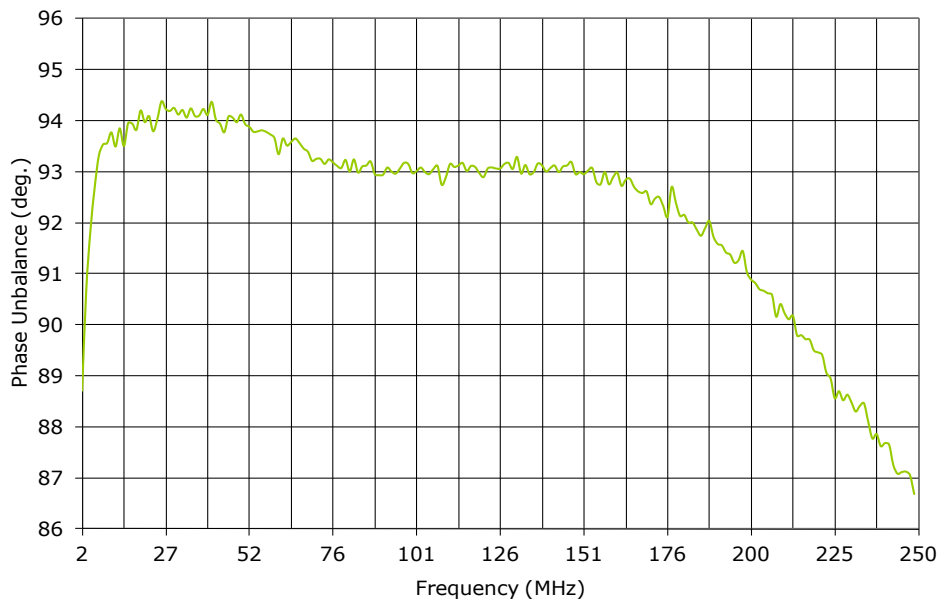

PERFORMANCE PLOTS


90° HYBRID

CONNECTORIZED MODEL: DQK-2-125B

125:1 BANDWIDTH

2 - 250 MHz

Data @ 25°C

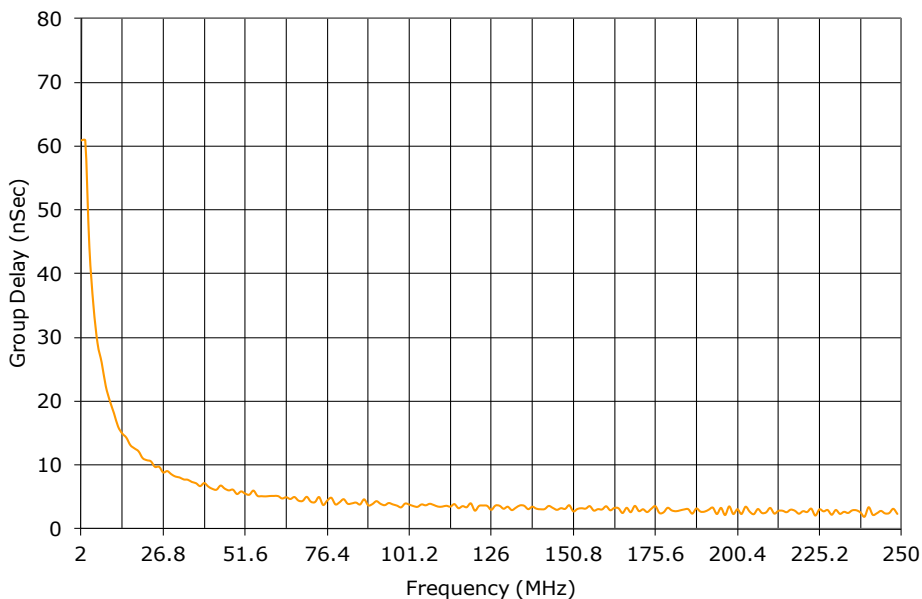

PERFORMANCE PLOTS