

# 6-WAY POWER DIVIDER

## CONNECTORIZED MODEL: DFK-7B1S

**WIDE BANDWIDTH**


**1 - 100 MHz**

**FEATURES:**

- ▶ Excellent Performance
- ▶ Wide Bandwidth
- ▶ Small Size
- ▶ Moderate Power
- ▶ Lead Free RoHS Compliant

**APPLICATIONS:**


- ▶ Signal Splitting & Low Power Combining

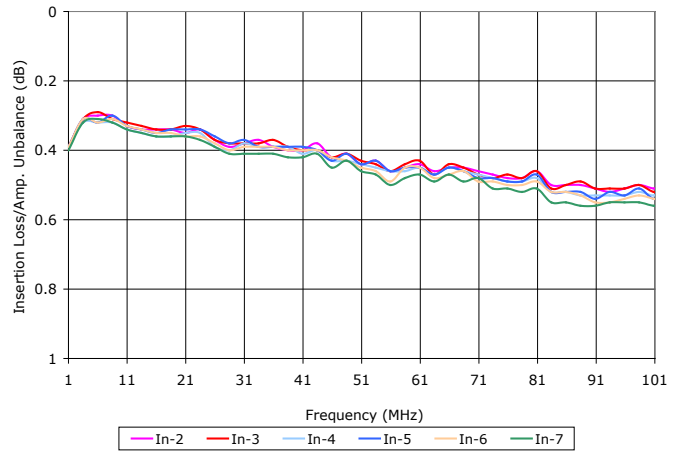

**SPECIFICATIONS (Rev. H 11/6/23)**

Frequency	1 - 100 MHz		
Insertion Loss (dB) *	Freq. (MHz)	Typ.	Max.
	1 - 10	0.3	0.6
	10 - 50	0.4	0.7
Isolation (dB)	Freq. (MHz)	Typ.	Min.
	1 - 10	30	25
	10 - 50	30	25
Phase Unbalance	Freq. (MHz)	Typ.	Max.
	1 - 10	0.2	1°
	10 - 50	0.5	2°
Amplitude Unbalance (dB)	Freq. (MHz)	Typ.	Max.
	1 - 10	0.05	0.2
	10 - 50	0.05	0.3
Input Power **	1 Watt (Max.)		
	VSWR		
	1.2:1 (Typ.)		
Impedance		50 Ohms (Nom.)	
Operating Temperature Range		-40 to +85 °C	

\* Above 7.78 dB theoretical split loss.  
 \*\* Handling power applies to splitter mode and assumes ideal 50 Ohms impedance matching on all ports.

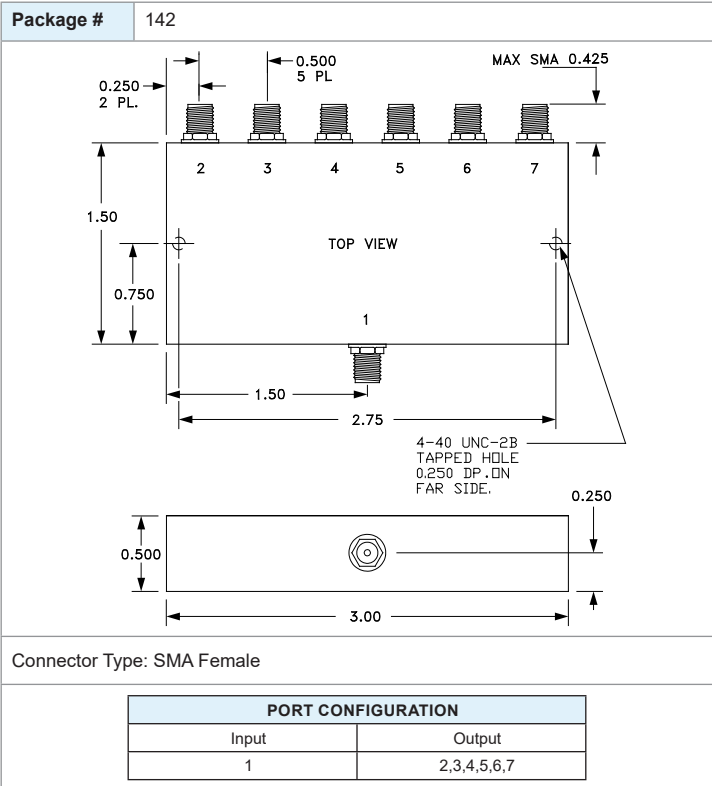



# 6-WAY POWER DIVIDER

## CONNECTORIZED MODEL: DFK-7B1S

WIDE BANDWIDTH

1 - 100 MHz

DATA @ 25°C

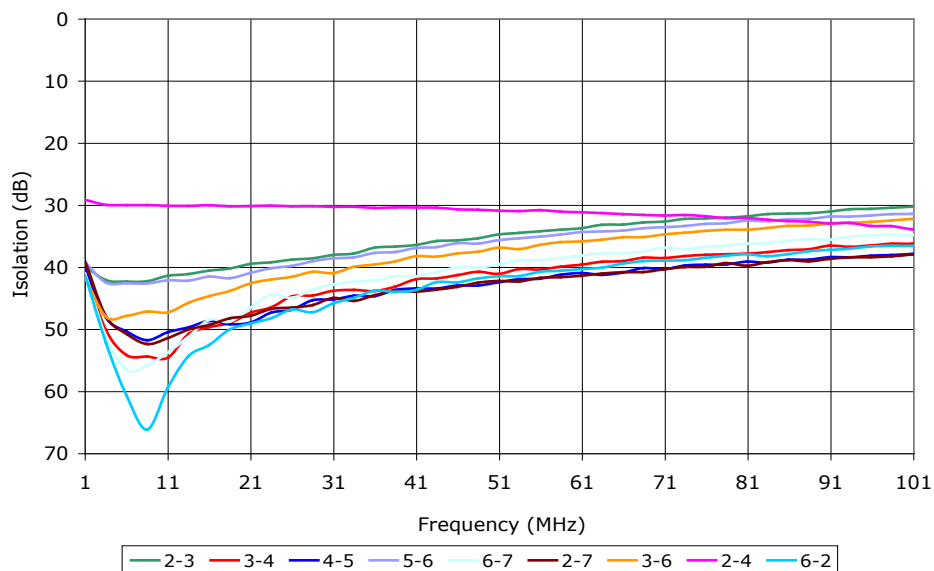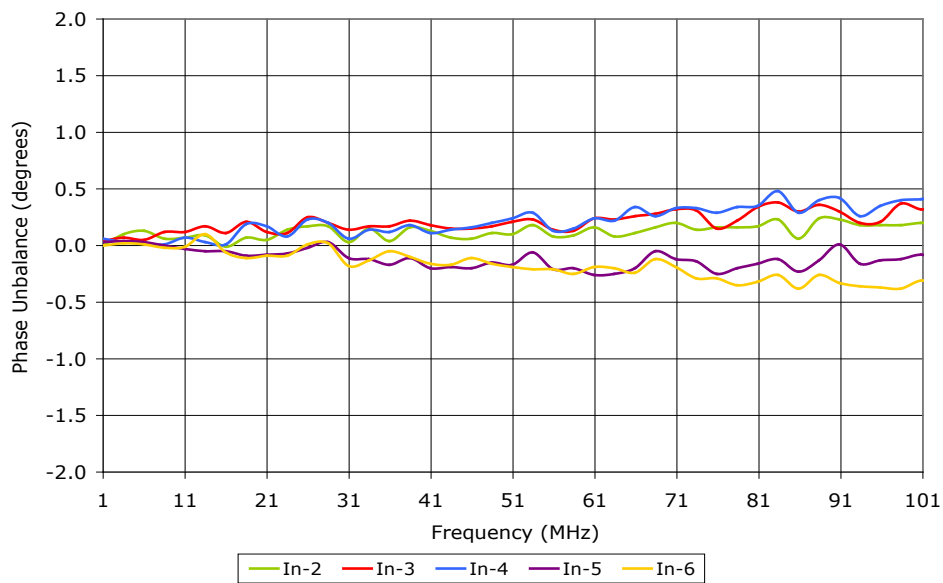

PERFORMANCE PLOTS

# 6-WAY POWER DIVIDER

## CONNECTORIZED MODEL: DFK-7B1S

**WIDE BANDWIDTH**

**1 - 100 MHz**

**DATA @ 25°C**

**PERFORMANCE PLOTS**

