

# 3-WAY POWER DIVIDER

## SURFACE MOUNT MODEL: SDL-135

**WIDE BANDWIDTH**



**5 - 750 MHz**

**FEATURES:**

- ▶ Excellent Performance
- ▶ Wide Bandwidth
- ▶ Small Size, Surface Mount
- ▶ Moderate Power
- ▶ REL-PRO® Patented Technology
- ▶ Lead Free RoHS Compliant

**APPLICATIONS:**

- ▶ Signal Splitting & Low Power Combining

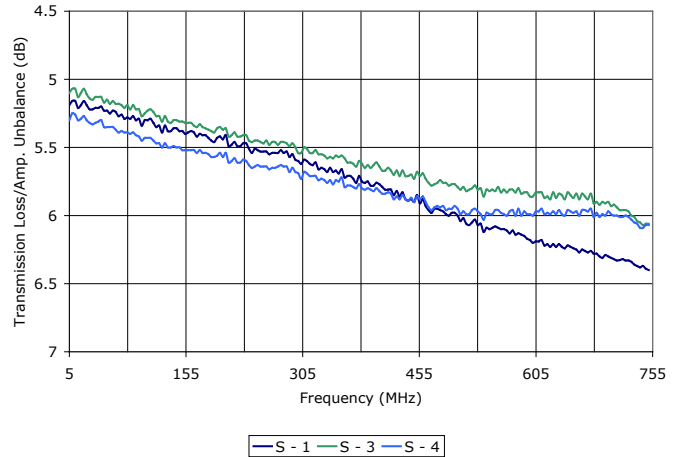

**SPECIFICATIONS (Rev. D 09/18/18)**

<b>Frequency</b>	5 - 750 MHz		
<b>Insertion Loss (dB) <sup>1</sup></b>	Freq. (MHz)	Typ.	Max.
	5-50	0.6	1.4
	50-350	0.8	1.6
	350-750	1.5	1.8
<b>Isolation (dB)</b>	Freq. (MHz)	Typ.	Min.
	5-50	25	18
	50-350	25	20
	350-750	23	18
<b>Phase Unbalance</b>	Freq. (MHz)	Deg. (Max.)	
	5-50	3	
	50-350	5	
	350-750	7	
<b>Amplitude Unbalance</b>	Freq. (MHz)	dB (Max.)	
	5-50	0.3	
	50-350	0.5	
	350-750	0.75	
<b>Input Power <sup>2</sup></b>	1 Watt (Max.)		
<b>Impedance</b>	50 Ohms (Nom.)		
<b>Operating Temperature Range</b>	-40 to +85 °C		

<sup>1</sup> Insertion loss is above the theoretical 4.8 dB splitting loss.  
<sup>2</sup> Handling power applies to splitter mode and assumes ideal 50 Ohms impedance matching on all ports.

**Package #** 159LF

**REL-PRO® PATENT NO. 7,612,296**

TOLERANCES ON THREE DECIMAL PLACES = ± 0.015  
 PACKAGE MOUNTING: SEE APPLICATION NOTES AN7200 & AN7301

Port Configuration		
Input	Output	Ext. GND
6	1,3,4	2,5



# 3-WAY POWER DIVIDER

## SURFACE MOUNT MODEL: SDL-135

WIDE BANDWIDTH

5 - 750 MHz

PERFORMANCE PLOTS

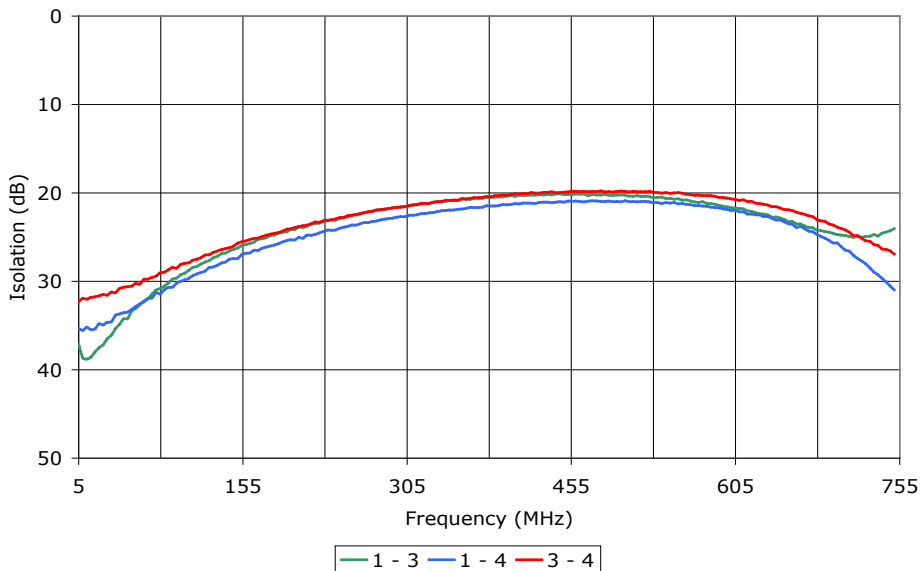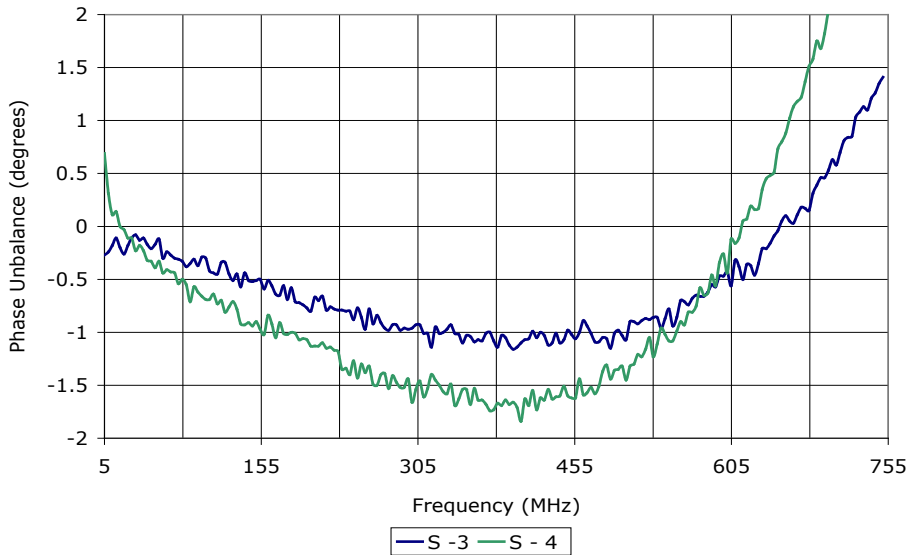

# 3-WAY POWER DIVIDER

## SURFACE MOUNT MODEL: SDL-135

WIDE BANDWIDTH

5 - 750 MHz

PERFORMANCE PLOTS

