

4-WAY POWER DIVIDER

SURFACE MOUNT MODEL: SPD-5-1500

WIDE BANDWIDTH


5 - 1500 MHz

FEATURES:

- ▶ Excellent Performance
- ▶ Small Size, Surface Mount
- ▶ Moderate Power
- ▶ Lead Free RoHS Compliant

APPLICATIONS:

- ▶ Signal Splitting & Low Power Combining

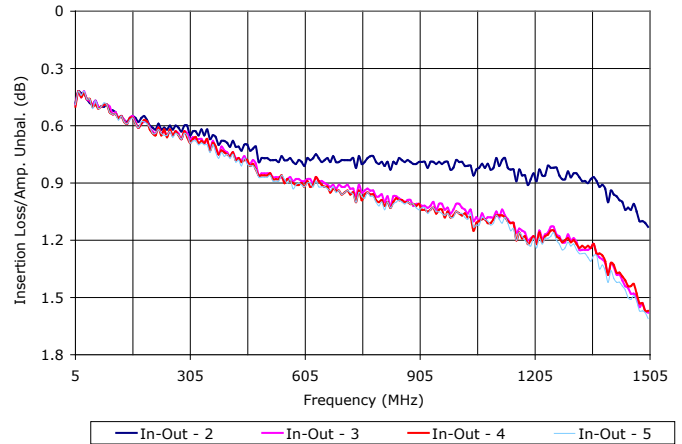

SPECIFICATIONS (Rev. A 09/30/11)

Frequency	5 - 1500 MHz		
Insertion Loss (dB) ¹	Freq. (MHz)	Typ.	Max.
	5 - 50	0.5	0.7
	50 - 750	1.0	1.3
	750 - 1500	1.5	2.0
Isolation (dB)	Freq. (MHz)	Typ.	Min.
	5 - 50	27	23
	50 - 750	23	20
	750 - 1500	20	17
Phase Unbalance (Deg.)	Typ.	Max.	
	5.0	7.0	
Amplitude Unbalance (dB)	Typ.	Max.	
	0.35	0.7	
VSWR	1.3:1 (Typ.)		
Input Power ²	1 Watt (Max.)		
Impedance	50 Ohms (Nom.)		
Operating Temperature Range	-40 to +85 °C		

¹ Insertion loss is above the theoretical 6.0 dB splitting loss.
² Handling power applies to splitter mode and assumes ideal 50 Ohms impedance matching on all ports.

Package # 219

PIN OUTS
 PIN 1 : INPUT
 PIN 2,3,4&5 : OUTPUTS
 ALL OTHER PINS GND

RECOMMENDED PCB LAYOUT

PACKAGE MOUNTING SEE APPLICATION NOTE AN7301

Port Configuration		
Input	Output	GND.
1	2,3,4,5	All Others



4-WAY POWER DIVIDER

SURFACE MOUNT MODEL: SPD-5-1500

WIDE BANDWIDTH

5 - 1500 MHz

Data @ 25 °C

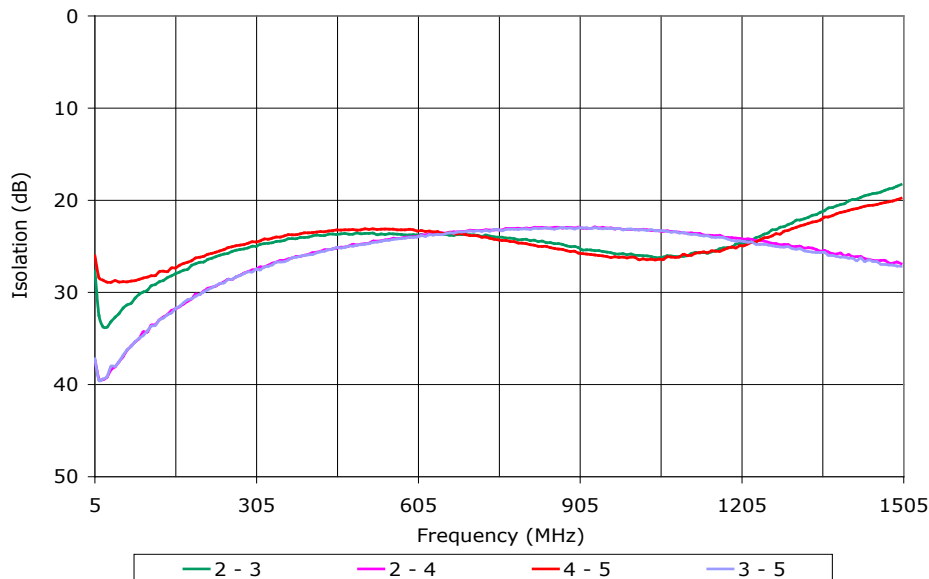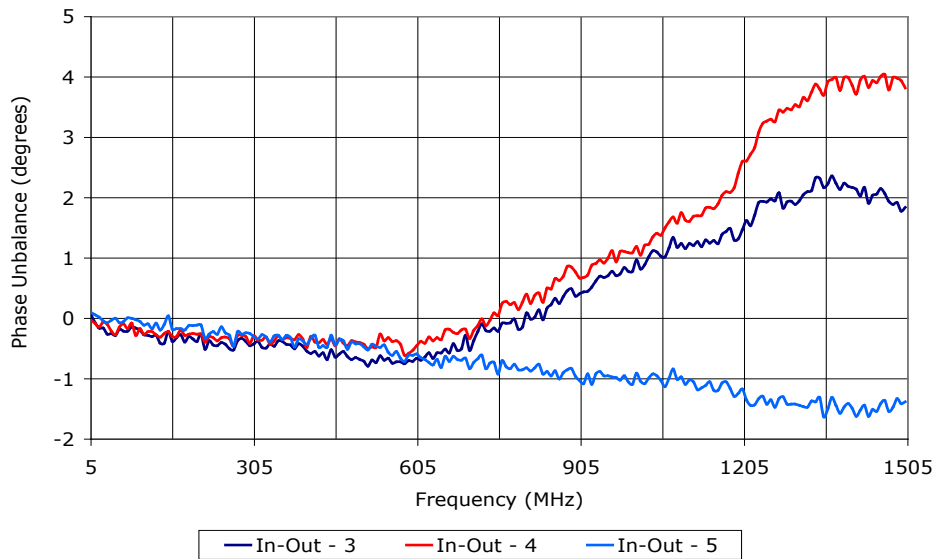

PERFORMANCE PLOTS


4-WAY POWER DIVIDER

SURFACE MOUNT MODEL: SPD-5-1500

WIDE BANDWIDTH

5 - 1500 MHz

Data @ 25 °C

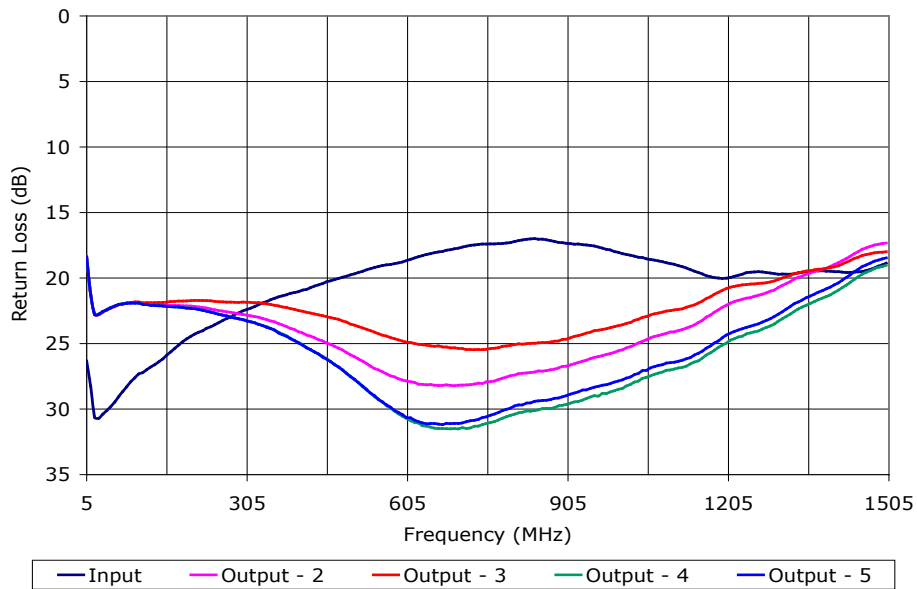

PERFORMANCE PLOTS