

BAND PASS FILTER


MODEL FNS-400

OPTIMIZED BANDWIDTH


F_c = 400 MHz

SPECIFICATIONS:

Center Frequency:	400 MHz	VSWR:	1.5:1 (Typ)
Passband I. Loss:	3.0 dB (Max)	Input Power	1 Watt (Max)
Passband:	380.9 - 420 MHz	Impedance:	50 Ohms
35 dB Bandwidth:	190.5 - 840 MHz	Operating Temp. Range:	-20° to +70° C



MECHANICAL OUTLINE:124S

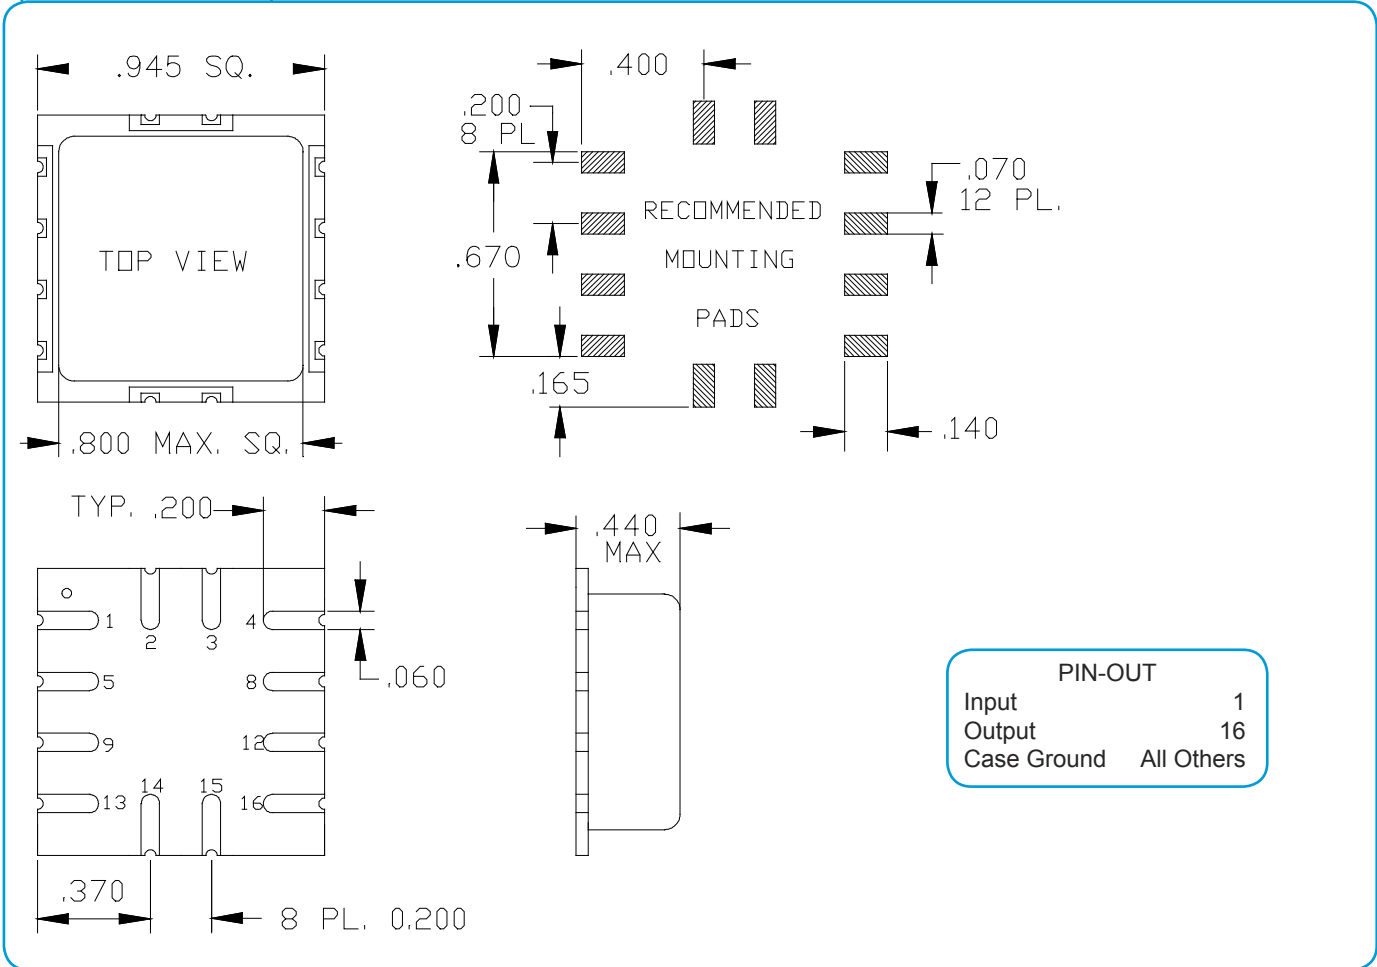

BAND PASS FILTER MODEL FNS-400

OPTIMIZED BANDWIDTH

$F_c = 400$ MHz

PERFORMANCE PLOTS

